




egeplast

egeplast

# 9010 RC

For sandbed-free installation, ploughing and milling

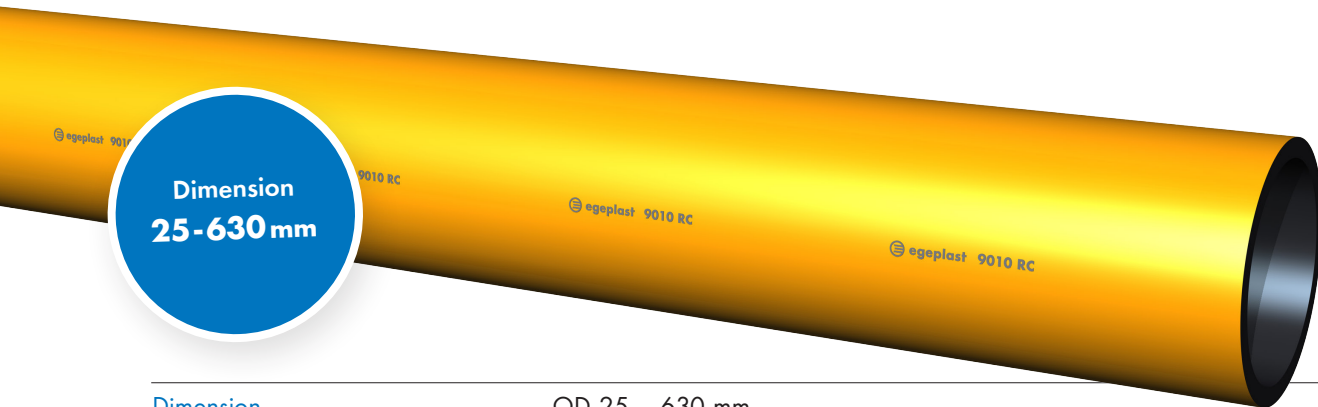

Dimension	OD 25 - 630 mm
SDR rating	SDR 11 (OD 25-630 mm)   17 (from OD 90 mm)   more available on request
Application	Gas
Pipe design	With a dimensionally integrated, coloured outer layer to indicate the medium
Material	PE 100-RC according to PAS 1075/EN 1555
Marking	Coloured meter marking in accordance with the relevant standard   Execution as embossed marking (others on request)
Delivery forms	Sticks of 6, 12 or 20 m   Other lengths on request
Product standards	DIN 8074/75   EN 1555   DVGW GW 335
Tests and certification	TÜV SÜD MUC-KSP-A 3008   MUC-KSP-A 3004
Regulations / Installation- and processing guidelines	DVGW G 472   DVS 2207-1   DIN EN 12007   DIN 4124   egeplast Processing Guidelines



Created: 08.12.2022 JK

Checked: 08.12.2022 JK

Approval: 08.12.2022 JK

Version: 1.0

This datasheet is for information purposes only. egeplast accepts no guarantee with respect to the up-to-dateness, accuracy and completeness of the information. egeplast reserves the right to revise and supplement this document without prior notice.

egeplast international GmbH

Robert-Bosch-Straße 7 • 48268 Greven • Tel. +49 2575 9710-0 • Fax +49 2575 9710-110 • info@egeplast.de • www.egeplast.de

