




egeplast

egeplast

egeMDR

Spigot and socket system for pressure applications

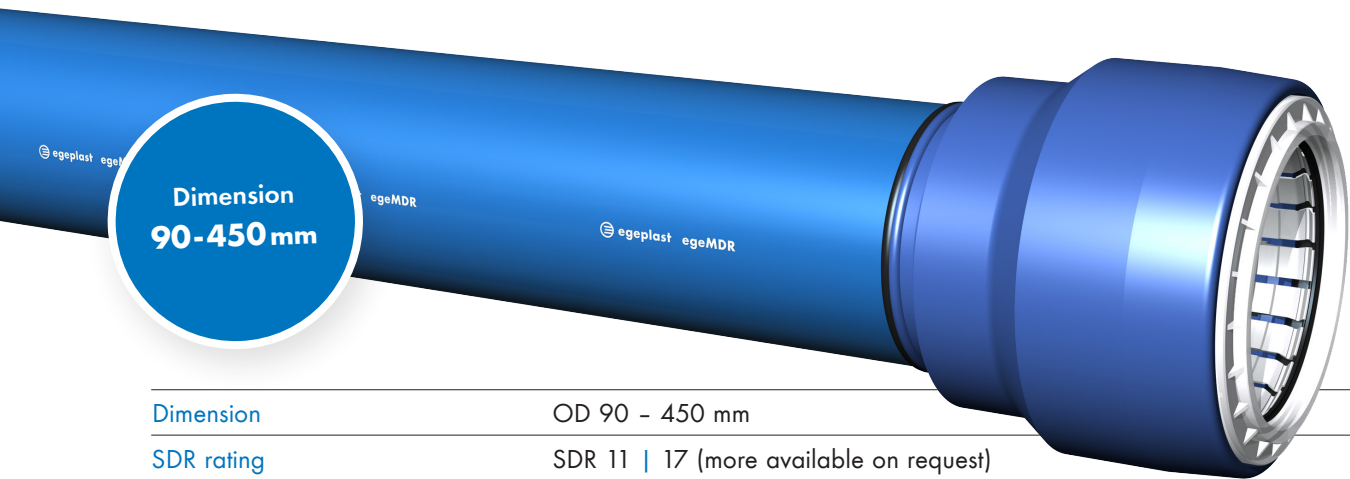

Dimension	OD 90 - 450 mm
SDR rating	SDR 11 17 (more available on request)
Application	Drinking water (others on request)
Pipe design	Spigot and socket system with weld-on socket prepared and chamfered by the manufacturer at the spigot end
Socket technology	Axially force locking socket system Integrated grip elements made from high-tensile plastics Spring-loaded individual segments flexibly adapt to the pipe Profile ring prevents contamination Elastomer ring ensures pretension
Versions	9010 RC pipe with dimensionally integrated, coloured outer layer RC pipe with additional protective layer
Delivery forms	Sticks of 6 or 12 m Other lengths on request
Product standards	DIN 8074/75 EN 12201 DVGW GW 335 A2/B2
Tests and certification	Pipe DVGW certified Socket DVGW certified
Services and Support	Pipe chamfering tools Installation devices Lubricants Instructions at the construction site Project planning Site monitoring

Created: 08.12.2022 JK

Checked: 08.12.2022 JK

Approval: 08.12.2022 JK

Version: 1.0

This datasheet is for information purposes only. egeplast accepts no guarantee with respect to the up-to-dateness, accuracy and completeness of the information. egeplast reserves the right to revise and supplement this document without prior notice.

egeplast international GmbH

Robert-Bosch-Straße 7 • 48268 Greven • Tel. +49 2575 9710-0 • Fax +49 2575 9710-110 • info@egeplast.de • www.egeplast.de

