




egeplast

egeplast

egeStatic

Protection against electro-static charges

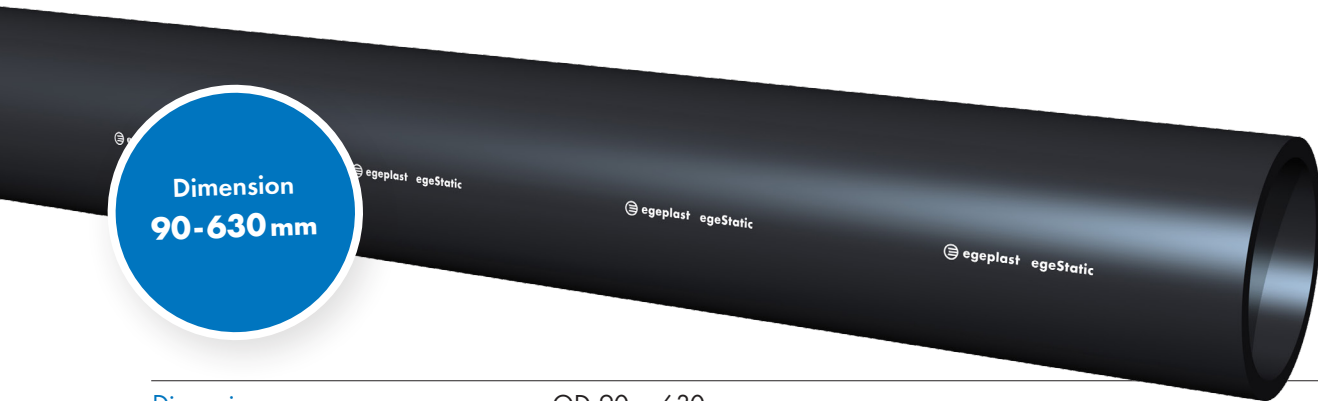

Dimension	OD 90 - 630 mm
SDR rating	SDR 7.4 9 11 13.6 17 (more available on request)
Application	Industry
Pipe design	Co-extruded multi-layer pipe: Outer layer made of electrically conductive PE Main pipe made of PE 100
Features	Transport pipe system for hydraulically and pneumatically conveyed media
Marking	Coloured meter marking Execution as embossed marking (others on request)
Delivery forms	Sticks of 6, 12 or 20 m Coiled bundles of 100 m Other lengths on request Drums on customer request
Product standards	Following DIN 8074/75 i.A. EN 12201 EN 80079-36
Regulations / Installation- and processing guidelines	DVS 2207-1 DVS 2210-1 DIN EN 805 DIN 4124
Services	Project planning Site monitoring

Created: 08.12.2022 JK

Checked: 08.12.2022 JK

Approval: 08.12.2022 JK

Version: 1.0

This datasheet is for information purposes only. egeplast accepts no guarantee with respect to the up-to-dateness, accuracy and completeness of the information. egeplast reserves the right to revise and supplement this document without prior notice.

egeplast international GmbH

Robert-Bosch-Straße 7 • 48268 Greven • Tel. +49 2575 9710-0 • Fax +49 2575 9710-110 • info@egeplast.de • www.egeplast.de

