




egeplast

egeplast

egeTherm High-T

For raised media temperatures

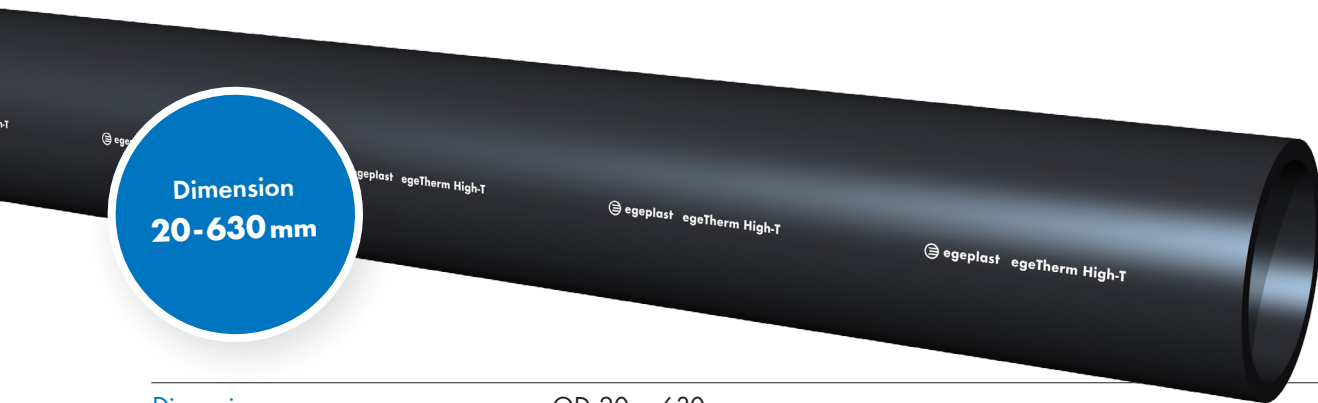

Dimension	OD 20 - 630 mm
SDR rating	SDR 7.4 9 11 13.6 17 (more available on request)
Application	Industry
Pipe design	Solid-wall pipe made of temperature-resistant PE-HD
Features	Extended service life at higher temperatures For applications up to max. 95° C (50 years at max. 70° C)
Marking	Coloured meter marking Execution as embossed marking (others on request)
Delivery forms	Sticks of 6, 12 or 20 m Coiled bundles of 100 m Other lengths on request Drums on customer request
Product standards	Following DIN 8074/75 i.A. EN 12201 ISO 24033 DIN EN ISO 22391-2
Tests and certification	TÜV SÜD MUC-KSP-A 3017
Regulations / Installation- and processing guidelines	DVS 2207-1 DVS 2210-1 DIN EN 805 DIN 4124
Services	Project planning Site monitoring



Created: 08.12.2022 JK

Checked: 08.12.2022 JK

Approval: 08.12.2022 JK

Version: 1.0

This datasheet is for information purposes only. egeplast accepts no guarantee with respect to the up-to-dateness, accuracy and completeness of the information. egeplast reserves the right to revise and supplement this document without prior notice.

egeplast international GmbH

Robert-Bosch-Straße 7 • 48268 Greven • Tel. +49 2575 9710-0 • Fax +49 2575 9710-110 • info@egeplast.de • www.egeplast.de

