


## 4 RFP Forms

### 4.1 RFP form for egeplast HexelOne® drinking water pipe

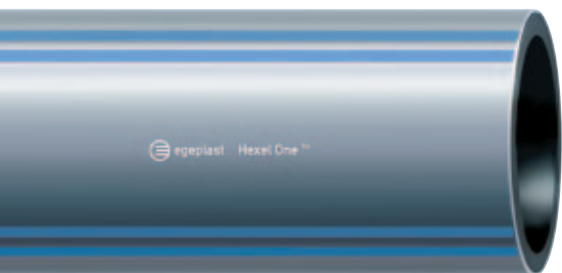

Preliminary remark:

Silver-coloured egeplast HexelOne® Raised Pressure drinking water pipe, blue double stripes identify the medium of drinking water. Dimensions are in accordance with DIN 8074, DIN EN 12201-2, three-layered structure with integrated functional layers made of PE100 and PE100-RC materials in accordance with DIN EN 12201-1. Inner layer made of black PE100-RC (FNCT in accordance with DVS 2203-4; requirement:  $\geq 8760$  h,  $T=80^{\circ}$  C,  $\sigma=4$  N/mm<sup>2</sup>, 2% Arcopal).

Pipe manufacturer certified acc. to DIN EN ISO 9001 (quality management), DIN EN ISO 14001 (environmental management) as well as DIN EN ISO 50001 (energy management).

It is essential that all requisite pipeline joints are made in accordance with the manufacturer's technical specifications. Welding is carried out in accordance with the requirements of the valid DVS technical guidelines. Jointing areas must be carried out in accordance with the pipe manufacturer's current regulations concerning technical installation. Pipelines must be stored and transported on the construction site in accordance with KRV guidelines.

**Product:**

egeplast HexelOne® Raised Pressure drinking water pipe

**Manufacturer:**

egeplast international GmbH

Robert-Bosch-Str. 7

D-48268 Greven

Tel.: +49.2575.9710-0

Fax: +49.2575.9710-110

e-mail: info@egeplast.de

www.egeplast.de

**Specifications:**

egeplast HexelOne® Raised Pressure drinking water pipe

Pipe dimension:

\_\_\_\_\_ mm x \_\_\_\_\_ mm


Supplied as 12 m sticks

Supplied as 70 / 140 m coils/drums

To supply \_\_\_\_\_ linear meters and install professionally as high pressure drinking water pipe in accordance with DIN and

pertinent installation instructions: \_\_\_\_\_ €/metre

## 4.2 RFP form for egeplast HexelOne® gas pipe

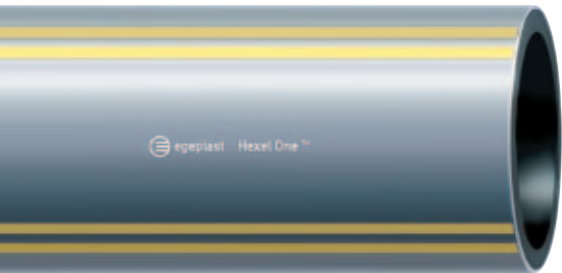

### Preliminary remark:

Silver-coloured egeplast HexelOne® Raised Pressure gas pipe, yellow/orange double stripes identify the medium of natural gas. Dimensions are in accordance with DIN 8074, DIN EN 1555-2 three-layered structure with integrated functional layers made of PE100 and PE100-RC materials in accordance with DIN EN 1555-1. Inner layer made of black PE100-RC (FNCT in accordance with DVS 2203-4; requirement:  $\geq 8760$  h,  $T=80^\circ$  C,  $\sigma=4$  N/mm<sup>2</sup>, 2% Arcopal).

Pipe manufacturer certified acc. to DIN EN ISO 9001 (quality management), DIN EN ISO 14001 (environmental management) as well as DIN EN ISO 50001 (energy management).

It is essential that all requisite pipeline joints are made in accordance with the manufacturer's technical specifications. Welding is carried out in accordance with the requirements of the valid DVS technical guidelines. Jointing areas must be carried out in accordance with the pipe manufacturer's current regulations concerning technical installation. Pipelines must be stored and transported on the construction site in accordance with KRV guidelines.

### Product:

egeplast HexelOne® Raised Pressure gas pipe

### Manufacturer:

egeplast international GmbH

Robert-Bosch-Str. 7

D-48268 Greven

Tel.: +49.2575.9710-0

Fax: +49.2575.9710-110

e-mail: info@egeplast.de

www.egeplast.de

### Specifications:

egeplast HexelOne® Raised Pressure gas pipe

Pipe dimension:

\_\_\_\_\_mm x \_\_\_\_\_mm

Supplied as 12 m sticks

Supplied as 70 / 140 m coils/drums

To supply \_\_\_\_\_ linear meters and install professionally as high pressure gas pipe in accordance with DIN and pertinent

installation instructions: \_\_\_\_\_€/metre