




egeplast

egeplast

# 3L Leak Control

Permanent monitoring for environmental protection

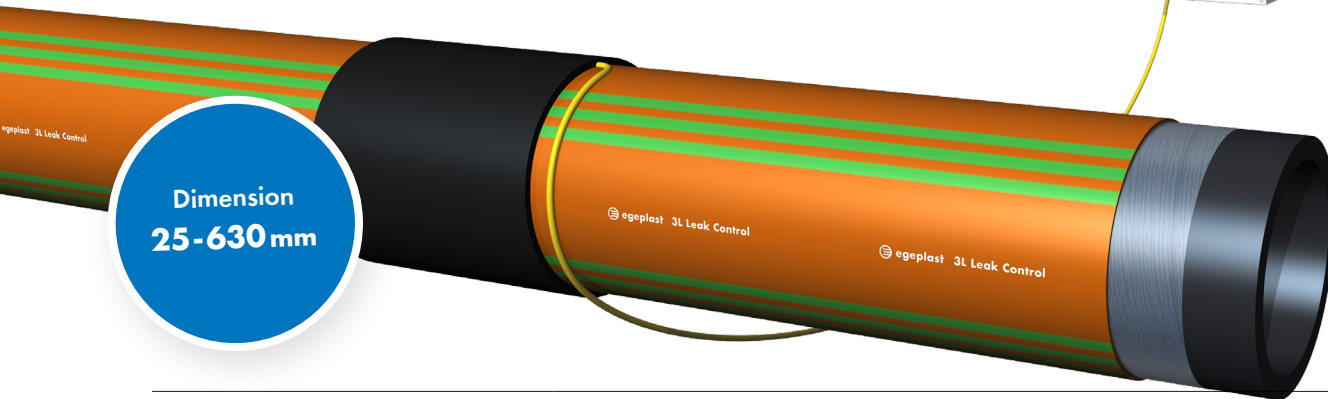

Dimension  
**25-630 mm**

Dimension	OD 25 - 630 mm
SDR rating	SDR 7.4   9   11   13.6   17 (more available on request)
Application	Sewage
Pipe design	<b>Medium pipe:</b> Black, PE 100-RC
	<b>Detection layer:</b> Diagonally overlapping, continuously wrapped aluminium foil
	<b>Protective layer:</b> Layer extruded onto the surface in a continuous manufacturing process, made of modified polyethylene PEplus, brown (colour coding for sewage) <b>Green triple stripes</b> to mark a pipe serving as a protective layer pipe
Features	Permeation barrier and permanent monitoring   Instant alarm in the event of damage   Precise pipe and damage tracking   With an abrasion-resistant protective layer, also for trenchless installation methods
Marking	Coloured meter marking of the medium pipe and protective layer in accordance with the relevant standard   Execution as embossed marking (others on request)
Delivery forms	Sticks of 6, 12 or 20 m   Coiled bundles of 100m   Other lengths on request   Drums on customer request
Product standards	DIN 8074/75   EN 12201   DWA-A 142   DWA-M 146
Tests and certification	TÜV SÜD MUC-KSP-A 3014 / MUC-KSP-A 3003 TÜV Nord AwSV with TRwS 793-1   TRwS 792
Regulations / Installation- and Processing Guidelines	DVGW GW 320   GW 321   GW 323   W 400   DVS 2207-1   DIN EN 805   DIN 4124   egeplast Processing Guidelines
Services and Support	Clamping jaws   Protective layer peeling devices   Instructions at the construction site   Project planning   Site monitoring   Commissioning



Created: 08.12.2022 JK

Checked: 08.12.2022 JK

Approval: 08.12.2022 JK

Version: 1.0

This datasheet is for information purposes only. egeplast accepts no guarantee with respect to the up-to-dateness, accuracy and completeness of the information. egeplast reserves the right to revise and supplement this document without prior notice.

egeplast international GmbH

Robert-Bosch-Straße 7 • 48268 Greven • Tel. +49 2575 9710-0 • Fax +49 2575 9710-110 • info@egeplast.de • www.egeplast.de

